



**NEEDLE VALVES**

- **Integral Bonnet Type, Female – Female Connection**
- SS 316/316L Bar stock construction
- Standard Working Pressure 6,000 PSI with PTFE packing.
- Grafoil offered for higher temperatures.
- Standard NPT End Connections.
- Heat Code Traceability.
- NACE MR-01-75 Compliant materials available on request.
- 3.1 Certificates furnished.
- Vent Plugs or Bleed Valves provided on request.
- PMI certificates available on request.

**Optional Materials Available :**

SS 316L, Hastelloy C276, Monel

**Temperature Rating :**

PTFE 450°F (232°C) Grafoil 700°F (371°C)

**Body :** Normal Body Type

**Inlet :** MNPT

**Outlet :** FNPT


**Bonnet Assembly :**

Screwed Bonnet Design

Back Seat Blow Out proof

Spindle – Ground and thread rolled, packing below the threads

Spindle Tip – Non-Rotating tip shut-off type & soft Seated

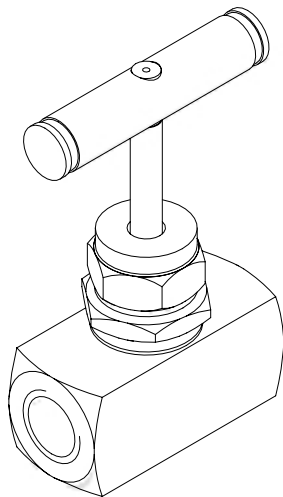

Model	Size	Orifice in mm
MNV-IB-FF-1	1/4"	4
MNV-IB-FF-2	3/8"	4
MNV-IB-FF-3	1/2"	6
MNV-IB-FF-4	3/4"	6
MNV-IB-FF-5	1"	8

- \* For any other material / size combinations, please contact the sales department.
- \* All specifications are subject to change without notice
- \* All sales subject to standard terms and conditions.

