

- Mini Valve Type, Female - Female Connection
- SS 316/316L Bar stock construction
- Standard Working Pressure 6,000 PSI with PTFE packing.
- Standard End Connections 1/4".
- Grafoil offered for higher temperatures.
- Standard NPT End Connections.
- Heat Code Traceability.
- NACE MR-01-75 Compliant materials available on request.
- 3.1 Certificates furnished.
- Vent Plugs or Bleed Valves provided on request.
- PMI certificates available on request

#### Optional Materials Available :

SS 316L, Hastelloy C276, Monel

#### Temperature Rating :

PTFE 450°F (232°C) Grafoil 700°F (371°C)

**Body :** Normal Body Type

**Inlet :** MNPT

**Outlet :** FNPT




#### Bonnet Assembly :

Screwed Bonnet Design

Back Seat Blow Out proof

Spindle - Ground and thread rolled, packing below the threads

Spindle Tip - Non-Rotating tip shut-of type & soft Seated

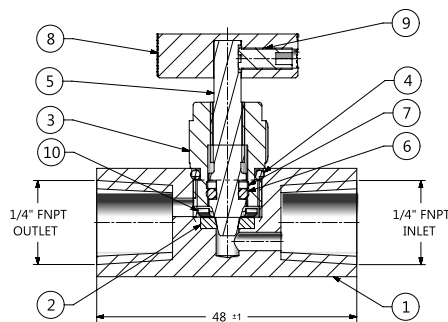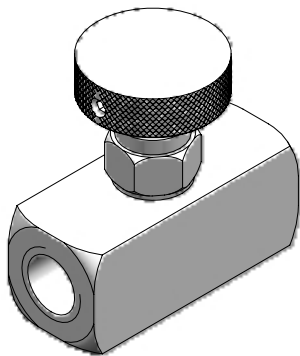

\*For any other material / size combinations, please contact the sales department.  
 \*All specifications are subject to change without notice  
 \*All sales subject to standard terms and conditions.

#### Magwell LLC

537 Cajundome Boulevard, Suite 111  
 Lafayette LA 70506, USA  
 info@magwellus.com  
 (888) 624-9355



Needle Valves